



# ONDA

The swaying of the flames on the logs inspired the shape of this graceful stove, which takes up, in its name, the movement of its base and its walls. The upper dome accentuates the rounded shapes that characterize this small-sized stove.

It is equipped with a 'Gran Fuoco' door, to facilitate the introduction of wood.

It can be equipped with a CARTER FOR EXTERNAL AIR INTAKE.

# MODELS AND SIZES


CLASSICHE WOOD



1

# INSTALLATION

Measurements in **cm**

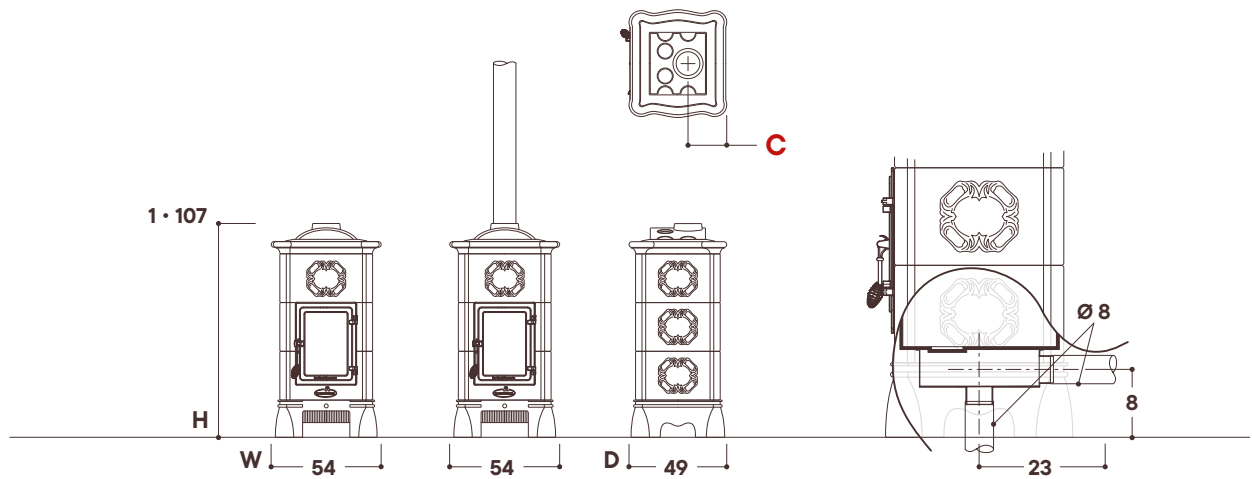

CLASSICHE WOOD

SIZE

1

C	cm	19
---	----	----

## CLEARANCES FROM FLAMMABLE MATERIALS

**Side:** 20 cm

**Rear:** 20 cm

**Front** (combustion chamber door): 100 cm

## INSTALLATION NOTES

- » The installations must be made in accordance with UNI 10683 (in Italy) or according to the regulations in force in the country where the stove is installed.
- » In the case of a rear smoke outlet with exposed pipe and flammable material near the stove, it is essential to use a double-walled pipe at least 10 cm away from all flammables.

# TECHNICAL DATA

## SIZE

1

Heat Output *	<i>kW</i>	6
Min-Max Heat Output	<i>kW</i>	3 - 7
Heating Capacity	<i>m<sup>3</sup></i>	85 - 200
Efficiency	%	77
Carbon Monoxide Emission · % Co 13% O <sub>2</sub>	%	0,06
Dust · 13% O <sub>2</sub>	<i>mg/Nm<sup>3</sup></i>	30
Wood Consumption	<i>Kg/h</i>	1,8
Smoke Temperature	°C	250
Flue Pipe Diameter	<i>cm</i>	12
Draft	<i>Pa</i>	11
Total Weight	<i>Kg</i>	170
Measurements (w x d x h)	<i>cm</i>	54 x 49 x 107
Energy Efficiency		A

\* Complies UNI EN-16510, DEUTSCHLAND BImSchV 2

## CERTIFICATIONS

**CE** UNI EN-16510

15a B-VG 

BImSchV 2 

