



ROUNDSTACK SLIM

Our round model, in a modern line, suitable for all environments. Equipped with a 'Gran Fuoco' door and ceramic base.

Available in 2 sizes.

It can be equipped with a CARTER FOR EXTERNAL AIR INTAKE.

MODELS AND SIZES

STACK




1



2

INSTALLATION

Measurements in **cm**

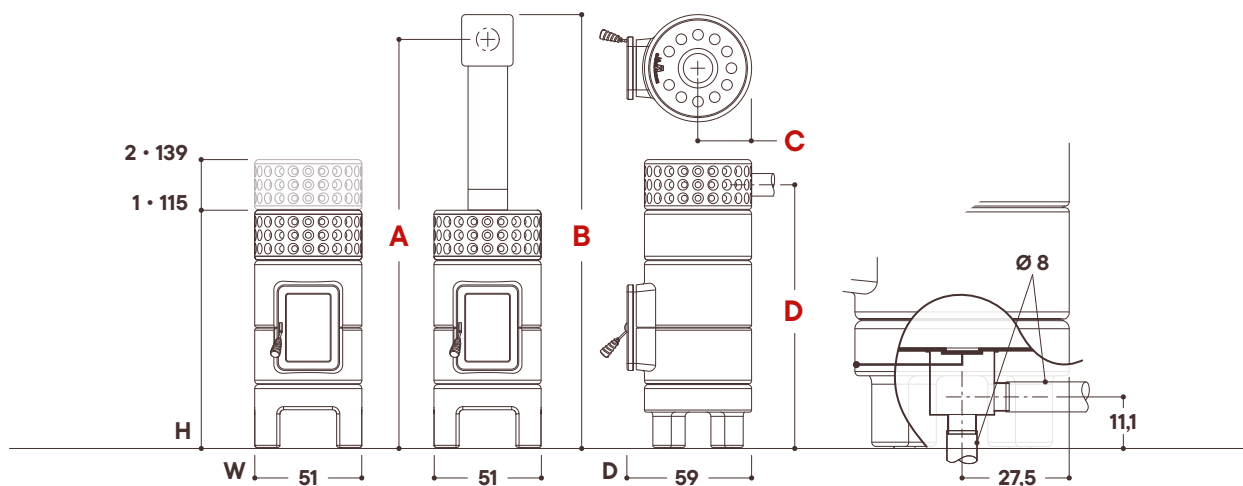

SIZE

| | | 1 | 2 | |
|-----------------------------|---|----|-----|-----|
| With Ceramic Column h 90 cm | A | cm | 218 | 242 |
| | B | cm | 231 | 255 |
| | C | cm | 26 | 26 |
| | D | cm | NO | 126 |

CLEARANCES FROM FLAMMABLE MATERIALS

Side: 30 cm

Rear: 20 cm

Front (combustion chamber door): 150 cm

INSTALLATION NOTES

- » The installations must be made in accordance with UNI 10683 (in Italy) or according to the regulations in force in the country where the stove is installed.
- » In the case of a rear smoke outlet with exposed pipe and flammable material near the stove, it is essential to use a double-walled pipe at least 10 cm away from all flammables.

TECHNICAL DATA

SIZE

| | | 1 | 2 |
|--|---------------|---------------|---------------|
| Heat Output * | <i>kW</i> | 6,5 | 7,5 |
| Min-Max Heat Output | <i>kW</i> | 4 - 8 | 4 - 9 |
| Heating Capacity | <i>m³</i> | 100 - 230 | 100 - 260 |
| Efficiency | % | 84 | 80,5 |
| Carbon Monoxide Emission · % Co 13% O ₂ | % | 0,09 | 0,07 |
| Dust · 13% O ₂ | <i>mg/Nm³</i> | 11 | 6 |
| Wood Consumption | <i>Kg/h</i> | 1,9 | 2,2 |
| Smoke Temperature | °C | 201 | 213 |
| Flue Pipe Diameter | <i>cm</i> | 15 | 15 |
| Draft | <i>Pa</i> | 12 | 12 |
| Total Weight | <i>Kg</i> | 230 | 260 |
| Ceramic Column Weight | <i>Kg</i> | 25 | 25 |
| Measurements (w x d x h) | <i>cm</i> | 51 x 59 x 115 | 51 x 59 x 139 |
| Energy Efficiency | | A + | A |

* Complies UNI EN-16510, DEUTSCHLAND BImSchV 2

STACK

CERTIFICATIONS

CE UNI EN-16510

15a B-VG 

BImSchV 2 

